

BOX TYPE FURNACES

1700 °C max. Temperature -MoSi₂ resistors

Model family: **BOX-AM10-1700**

Description.

BOX-AM10-1700 model being able to reach and maintain temperature at **1700 °C continuously** represents an ultra high temperature chamber furnace.

This model family, whilst maintaining the same advantages and performance that our BOX-AM10-1600 model family has, was designed to provide a solution for applications requiring highest treatment temperature.

Best quality and highest temperature ratings MoSi₂ resistors used, known for their long working life under oxidizing atmosphere, are not affected by thermal shock and can withstand very high element power loads thereby provide a heating solution for extremely fast temperature ramping processes. Can be used continuously or intermittently with no restriction.


Having as major priority the economical operation this furnace was designed with double wall low mass density thermal ceramic insulation serving both as a heat exchanger preheating the incoming air and as a heat barrier improving the overall thermal insulation.

With adjustable air opening at the back and an exhaust chimney at the top, creating a strong natural convection, the entire volume of the chamber can be refreshed several times per minute. The preheated incoming air is entering the chamber through multiple holes creating a smooth and temperature uniform laminar air stream through the sample. Using **THERMANSYS® PCC** (Power Consistent Control) close loop power control management platform, based on accurate true rms Volt/Ampere measurements, these furnaces have optimum performance in terms of Power Factor and EMC standards compliance. Focusing our control management on the specific resistor properties the workable their life is significantly extended and the temperature control is remarkably accurate both under fast ramping and stable point.

Taking advantage of the optional addition of up to two flow control systems (calibrated for Nitrogen and Air) the user can prepare flow mixtures with preset concentrations of Oxygen in Nitrogen or work under fully inert (Nitrogen) atmosphere. Equipped with a touch screen computer, running the specially developed **PYROLOGISM 2.0** software, these furnaces present a truly unique and friendly, windows architecture, operator environment with advanced features.



Model shown is BOX-AM10-V4.5-1700.

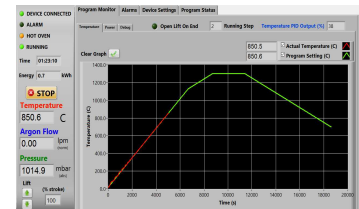

Key features.


- Control strategy based on Thermansys® PCC (Power Consistent Control) platform insures silent operation and compliance with EMC standards.
- PID control constantly conforms to various load needs. Accurate and uniform temperature profiles.
- Modern double wall construction keeps external surfaces temperature low, emphasizing in operator safety. Internal skin is exclusively made from stainless steel to enhance durability.
- Ergonomic design with no protruding edges, bolts or other features combines stainless steel parts with painted finish parts for an improved esthetic result.
- Lift up door keep hot surfaces away from operator.
- Touch Screen Computer running PYROLOGISM 2.0 software human-machine interface.
- 3 user process thermocouple inputs available (B, E, J, K, N, R, S, T type- software configurable).
- Power and true RMS Current measuring circuits.
- Heater failure, open control thermocouple detection, door open alarms and interlocks. Alarms and events front panel led array.
- Alarm event output (dry contact 3A/250V AC/DC).
- Stand alone over-temperature limiter (Watchdog) with manual reset in accordance with EN 60519-2 to protect the oven and load. Overrides main controller and cut off heater power if user adjustable high limit is reached.

Contact details

Ath. Stagiriti 7- Pilea, Thessaloniki Greece, 55534
 tel. 0030 2310 942346, fax. 0030 2310 942336
 e-mai: info@thermansys.com
www.Thermansys.com

Information and data contained in this document was considered correct at the time of publication. Thermansys® is reserving the right to make modifications as a result of design improvements.

PYROLOGISM control and monitoring software.

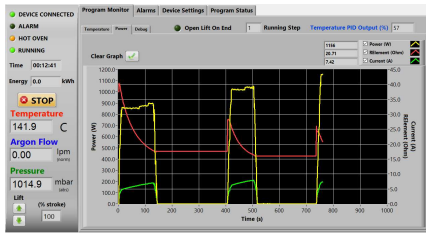

Description	Status	Reset
Open Thermocouple	OK	Over Alarm Reset
Open Circuit	OK	Over Alarm Reset
Short Circuit	OK	Over Alarm Reset
LIR Calibration	OK	LIR Alarm Reset
Low Argon Flow	OK	Argon Low Flow Alarm Reset
Vacuum Leak	OK	Vacuum Leak Alarm Reset
Over Temperature Watchdog	OK	Watchdog Alarm Reset
Watchdog Temperature (C)	0.0	Watchdog Active Set Point (C)
Watchdog Set Point (C)	0.0	0.0

- Quick setting of a single ramp rate to a set point -run on timer function.
- Set-point programming with up to 15 ramp and constant temperature programming steps – graphical inspection of programming.
- Storage and reload of unlimited number of distinct programs.
- Real time chart illustrating control temperature, running set point and user process temperatures with dynamic zoom.
- Real time true-RMS Current (A), Voltage (V) and Power (W) measurements.
- Real time actual Power (W) and totalized Energy (kWh) chart.
- Saves all data on local memory.
- Tools for manual PID tuning and auto-tuning or adaptive tuning function.
- Virtual keyboard, alarm and event message tab.
- Watchdog over temperature limiter monitor/configuration.
- Gas flow, monitoring and control interface pages activated if corresponding optional modules are enabled.
- Versions running at Microsoft® Windows are available for control by a PC through USB port.
- Remotely monitoring and control through network connection.

Specifications and Ordering Information.

Standard features:

- Maximum continuous temperature 1700 °C.
- Operating Power: 208 /240VAC – 50/60Hz.
- Two in depended B type embedded thermocouples for controller and over-temperature limiter feedback.
- Temperature control accuracy ± 1 °C.
- Exposed resistors type.
- Thermocouple inputs:
3 chan. - B, E, J, K, N, R, S, T type- software configurable.
24 bit A/D conversion, 0-45°C cold junction compensated
Typical accuracy $\pm 0.2\%$ f.s @ 25 , resolution 0.1 °C

Optional features:

- Flow controllers:
Number of lines: 1 or 2
Line 1 gas type calibration: Air
Line 2 gas type calibration: Nitrogen (N₂)
Flow range: 0.01-20 std L/min
Accuracy: $\pm 2\%$ of reading for Air
 $\pm 3\%$ of reading for N₂
Typical Control stability: ± 0.1 std L/min.
Temperature (0-50°C), Pressure (0-15 psig) comp.
Filtration: Not provided, user supplied HEPA grade

CE Certified. Compliant with **Low Voltage Directive 2006/95/EC** (harmonized referenced standard EN 61010-1: 2001 and EN 61010-2-010:2003) and **EMC Directive 2004/108/EC** (harmonized referenced standard EN 61326-1:2006).

Produced in **GREECE** following **ISO 9001:2008** quality management system and **ISO 14001:2004** environmental management system.

TABLE1. BOX-AM10-1700 Family Models

Model Part Number	Max. Cont. Temp. °C x Heat up time* min	Furnace internal dim. WxHxD mm	Heated Volume liters	Furnace external dim. WxH**xD mm	Nominal Max. Power (W)
BOX-AM10... _V2.5-1700	1600 x 70	140x160x120	2.5	500x770x520	2600
_V4.5-1700	1600 x 70	140x160x200	4.5	500x770x520	4200
_V6.3-1700	1600 x 70	140x160x320	7.0	500x770x640	6400
_V10-1700	1600 x 70	160x200x320	10.0	520x810x640	7600

* Furnace working with no load.

** Plus 100 mm for chimney

IMPORTANT ORDERING NOTES:

- Models Part Number listed in Table 1 concern complete turn key systems without flow controllers included.

Ordering Examples:

- BOX-AM10_V2.5-1700: This Part Number includes one BOX-AM10-1700 family furnace having 140x160x120 mm internal chamber dimensions including all standard features.

- To order the furnace with one flow controller add at the end of the part number the suffix "LINE X",

e.g: BOX-AM10-V2.5-1700-LINE1 for air calibration or BOX-AM10-V2.5-1700-LINE2 for Nitrogen calibration

- To order the furnace with two flow controllers add at the end of the part number the suffix "LINE 1/2",

e.g: BOX-AM10-V2.5-1700-LINE1/2.

Contact details

Ath. Stagiriti 7- Pilea, Thessaloniki Greece, 55534

tel. 0030 2310 942346, fax. 0030 2310 942336

e-mai: info@thermansys.com

www.Thermansys.com

Information and data contained in this document was considered correct at the time of publication. Thermansys® is reserving the right to make modifications as a result of design improvements.