


BOX TYPE FURNACES

1600 °C Max. Temperature - Large Volume - MoSi₂ resistors

Model family: **BOX-AM20-1600**

Description.

BOX-AM20-1600 model is a powerful large volume chamber furnace family concentrating numerous of advantages and providing a single piece solution for the research and small production laboratory.

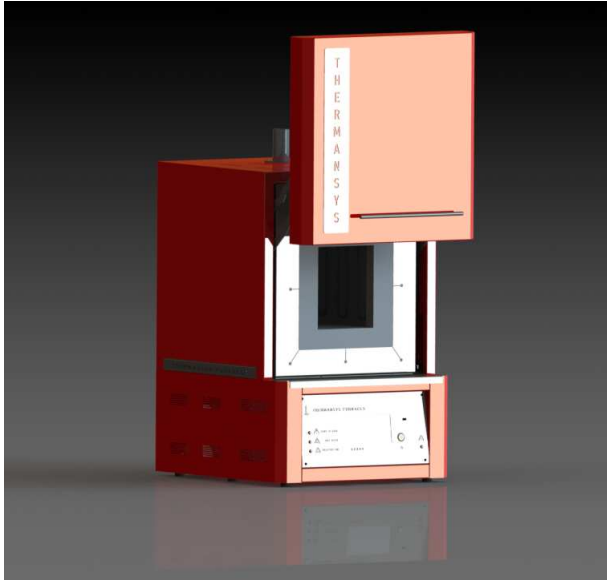

Model shown is BOX-AM20-18-1600.

Equipped with a **touch screen computer, running the specially developed PYROLOGISM 2.0** software, these furnaces present a truly unique and friendly, windows architecture, operation environment.



Optional addition up to two **embedded flow controllers** the user can prepare flow mixtures with preset concentrations of Oxygen in Nitrogen or work under fully inert (Nitrogen) atmosphere

Best quality MoSi₂ resistors used, known for their long working life under oxidizing atmosphere, are not affected by thermal shock and can withstand very high element power loads thereby provide a heating solution for extremely fast temperature ramping processes. Can be used continuously or intermittently with no restriction.

Taking advantage of the THERMANSYS® PCC (Power Consistent Control) close loop power control management platform and based on accurate true rms Volt/Ampere measurements, these furnaces have optimum performance in terms of Power Factor and EMC standards compliance. Focusing our control management on the specific resistor properties the workable life of the heater is significantly extended and the temperature control is remarkably accurate both under fast ramping and stable point.

Having as major priority the economical operation this furnace was designed with double wall low mass density thermal ceramic insulation serving both as a heat exchanger preheating the incoming air and as a heat barrier improving the overall thermal insulation.

With adjustable air opening in the back side and an exhaust chimney at the top, creating a strong natural convection, the entire volume of the chamber can be refreshed several times per minute. The preheated incoming air is entering and exiting the chamber through multiple holes creating a smooth and temperature uniform laminar air stream through the sample.

Key features.



- Control strategy based on Thermansys® PCC (Power Consistent Control) platform insures silent operation and compliance with EMC standards.
- PID control. Accurate temperature profiles.
- Modern double wall construction keeps external surfaces temperature low emphasizing in operator safety.
- Lift up door keep hot surfaces away from operator. Door open interlock
- Touch Screen Computer running PYROLOGISM 2.0 software human-machine interface.
- 3 user process thermocouple inputs available (B, E, J, K, N, R, S, T type- software configurable).
- Stand-alone over-temperature limiter (Watchdog) with manual reset in accordance with EN 60519-2 to protect the oven and load. Overrides main controller and cut off heater power if user adjustable high limit is reached. Alarm event output (dry contact 3A/250V AC/DC).

Contact details

Ath. Stagiriti 7- Pilea, Thessaloniki Greece, 55534
tel. 0030 2310 942346, fax. 0030 2310 942336
e-mai: info@thermansys.com
www.Thermansys.com

Information and data contained in this document was considered correct at the time of publication. Thermansys® is reserving the right to make modifications as a result of design improvements.

PYROLOGISM control and monitoring software.

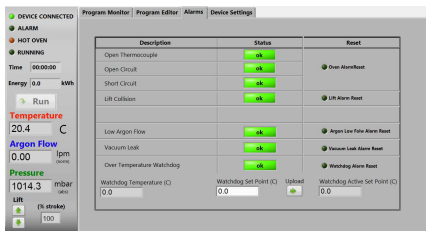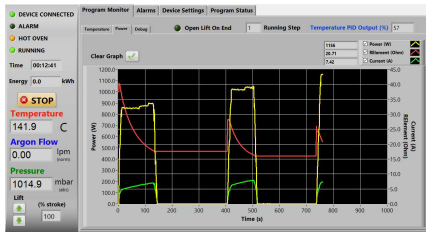

- Quick setting of a single ramp rate to a set point -run on timer function.
- Set-point programming with up to 15 ramp and constant temperature programming steps – graphical inspection of programming.
- Storage and reload of unlimited number of distinct programs.
- Real time chart illustrating control temperature, running set point and user process temperatures with dynamic zoom.
- Real time true-RMS Current (A), Voltage (V) and Power (W) measurements.
- Real time actual Power (W) and totalized Energy (kWh) chart.
- Saves all data on local memory.
- Tools for manual PID tuning and auto-tuning.
- Virtual keyboard, alarm and event message tab.
- Watchdog over temperature limiter monitor/configuration.
- Heater failure, open control thermocouple detection, door open alarms and interlocks. Alarms and events front panel led array.
- Gas flow, monitoring and control interface pages activated if corresponding optional modules are enabled.
- Versions running at Microsoft® Windows are available for control by a PC through USB port.
- Remotely monitoring and control through network connection.

Specifications and Ordering Information.

Standard features:

- Maximum continuous temperature 1550 °C.
- Operating Power: 208 /240VAC – 50/60HZ.
- Two in depended B type embedded thermocouples for controller and over-temperature limiter feedback.
- Temperature control accuracy ±1 °C.
- Exposed resistors type.
- Thermocouple inputs:
3 chan. - B, E, J, K, N, R, S, T type- software configurable.
24 bit A/D conversion, 0-45°C cold junction compensated
Typical accuracy ±0.2% f.s @ 25 , resolution 0.1 °C

Optional features:

- Flow controllers:
Number of lines: 1 or 2
Line 1 gas type calibration: Air
Line 2 gas type calibration: Nitrogen (N₂)
Flow range: 0.01-20 std L/min
Accuracy: ±2% of reading for Air
±3% of reading for N₂
Typical Control stability: ± 0.1 std L/min.
Temperature (0-50°C), Pressure (0-15 psig) comp.
Filtration: Not provided, user supplied HEPA grade

CE Certified. Compliant with **Low Voltage Directive 2006/95/EC** (harmonized referenced standard EN 61010-1: 2001 and EN 61010-2-010:2003) and **EMC Directive 2004/108/EC** (harmonized referenced standard EN 61326-1:2006).
Produced in GREECE following ISO 9001:2008 quality management system and ISO 14001:2004 environmental management system.

TABLE1. BOX-AM20-1600 Family Models

Model Part Number	Max. Cont. Temp. °C x Heat up time* min	Furnace internal dim. WxHxD mm	Heated Volume liters	Furnace external dim. WxH**xD mm	Nominal Max. Power (W)
BOX-AM20... _V18-1600	1600 x 50	200x260x340	17.7	640x940x700	8000
_V28-1600	1600 x 50	260x260x420	28.4	700x940x780	10000
_V38-1600	1600 x 50	300x300x420	37.8	740x980x780	12000

* Furnace working with no load.

** Plus 100 mm for chimney

IMPORTANT ORDERING NOTES:

- Models Part Number listed in Table 1 concern complete turn key systems without flow controllers included.

Ordering Examples:

- BOX-AM20_V18-1600: This Part Number includes one BOX-AM20-1600 family furnace having 200x260x340 mm internal chamber dimensions including all standard features.
- To order the furnace with one flow controller add at the end of the part number the suffix “LINE X”,
e.g: BOX-AM20_V18-1600-LINE1 for air calibration or BOX-AM20_V18-1600-LINE2 for Nitrogen calibration
- To order the furnace with two flow controllers add at the end of the part number the suffix “LINE 1/2”,
e.g: BOX-AM20_V18-1600-LINE1/2.

Contact details

Ath. Stagiriti 7- Pilea, Thessaloniki Greece, 55534
tel. 0030 2310 942346, fax. 0030 2310 942336
e-mai: info@thermansys.com
www.Thermansys.com

Information and data contained in this document was considered correct at the time of publication. Thermansys® is reserving the right to make modifications as a result of design improvements.